


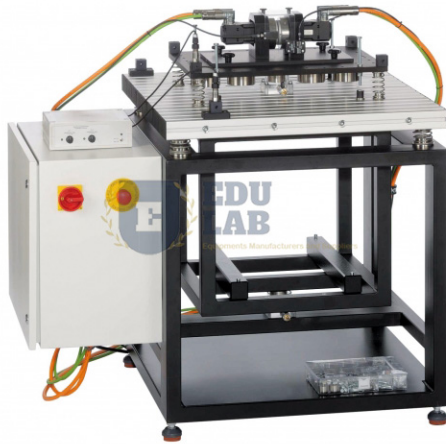

Product Code . EL-MTM-11574

Vibrations On Machine Foundations

Description

Vibrations On Machine Foundations

The can be used to investigate the problems of foundations and vibration isolation using a practical example. To do this, vibrations are generated and measured on a foundation. Springs are then used to try out different tunings and vibration absorbers are used to investigate absorption effects. This is installed on a foundation using springs and dampers. The foundation represents the surroundings and can be used to measure the effectiveness of the vibration isolation. An indispensable element of machine design is targeted reduction of vibrations. An elastic, vibration insulating installation of the machine avoids the transmission of harmful vibrations to the surroundings.

Additional helical springs connect the foundation to the actual frame of the trainer. This double vibration isolation, combined with the high fixed weight of the frame, guarantees vibration-free laboratory operation, even under unfavourable experimental conditions.

Technical data Vibrations On Machine Foundations

- Drive motors.
- Max. Speed: 6.000min-1.
- Max. Torque: approx. 3,40nm.
- Machine mounted on a plate.

- Mass: max. 26kg (incl. Additional weights 4x 2kg).
- Max. Imbalance: 2x 5kgmm.
- Max. Imbalance force: 2x 500n (up to 3.000min-1).

We are leading manufacturers, suppliers of Vibrations On Machine Foundations for Mechanics Training Models. Contact us to get high quality Vibrations On Machine Foundations for Mechanics Training Models for schools, colleges, universities, research labs, laboratories and various industries.

```
{ "@context": "https://schema.org/", "@type": "Product", "name": "Vibrations On Machine Foundations", "image": "http://www.educational-equipments.com/images/catalog/product/997148411VibrationsOnMachineFoundations.jpg", "description": "The can be used to investigate the problems of foundations and vibration isolation using a practical example. To do this, vibrations are generated and measured on a foundation. Springs are then used to try out different tunings and vibration absorbers are used to investigate absorption effects. This is installed on a foundation using springs and dampers. The foundation represents the surroundings and can be used to measure the effectiveness of the vibration isolation. An indispensable element of machine design is targeted reduction of vibrations. An elastic, vibration insulating installation of the machine avoids the transmission of harmful vibrations to the surroundings. Additional helical springs connect the foundation to the actual frame of the trainer. This double vibration isolation, combined with the high fixed weight of the frame, guarantees vibration-free laboratory operation, even under unfavourable experimental conditions. Technical data Vibrations On Machine Foundations • Drive motors. • Max. Speed: 6.000min-1. • Max. Torque: approx. 3,40nm. • Machine mounted on a plate. • Mass: max. 26kg (incl. Additional weights 4x 2kg). • Max. Imbalance: 2x 5kgmm. • Max. Imbalance force: 2x 500n (up to 3.000min-1). We are leading manufacturers, suppliers of Vibrations On Machine Foundations for Mechanics Training Models. Contact us to get high quality Vibrations On Machine Foundations for Mechanics Training Models for schools, colleges, universities, research labs, laboratories and various industries.", "brand": "Educational Lab Equipments", "sku": "5", "gtin8": "5", "gtin13": "5", "gtin14": "5", "mpn": "5", "aggregateRating": { "@type": "AggregateRating", "ratingValue": "5", "bestRating": "5", "worstRating": "0", "ratingCount": "15" }}
```

Educational Lab Equipments,
#449, HSIIDC, Industrial Area, Saha, Haryana
Direct Contact Details  +91-98173-19615  sales@educational-equipments.com
 www.educational-equipments.com